



MDRIVE[®] 23 MOTOR+DRIVER *Plus* SPEED CONTROL

FEATURES

- Highly Integrated Microstepping Driver, Intelligent Variable Speed Controller and NEMA 23 High Torque 1.8° Brushless Step Motor
- Advanced 2nd Generation Current Control for Exceptional Performance and Smoothness
- Single Supply: +12 up to +75 VDC*
- Cost Effective
- Extremely Compact
- 20 Microstep Resolutions up to 51,200 Steps Per Rev Including: Degrees, Metric, Arc Minutes
- 10-bit Analog Speed Control Input Accepts:
 - 0 to +5 VDC
 - 0 to +10 VDC
 - 4 to 20 mA
 - 0 to 20 mA
 - 15 to 25 kHz PWM
- Automatic Current Reduction
- Electronically Configurable:
 - Motor Run/Hold Current
 - Microstep Resolution
 - Acceleration/Deceleration
 - Initial and Max Velocity
 - Hold Current Delay Time/Motor Settling Delay Time
 - Programmable Filtering for the Start/Stop Input
- Available Options:
 - Long Life Linear Actuators**
 - External Optical Encoder
 - Integrated Planetary Gearbox
 - Control Knob for Manual Positioning
- 4 Rotary Motor Lengths Available
- Setup Parameters May Be Switched On-The-Fly
- Interface Options:
 - Pluggable Terminal Strip
 - 12.0" (30.5cm) Flying Leads
- Graphical User Interface (GUI) for Quick and Easy Parameter Setup

* 12-75 VDC single, double & triple length motors; 12-60 VDC quad length motor.

** Consult Factory for Availability.

DESCRIPTION

The **MDrive[®]23Plus Speed Control** offers system designers cost effective, programmable velocity control integrated with a NEMA 23 high torque 1.8° brushless step motor and a +12 up to +75 VDC* microstepping driver.

The MDrive23Plus Speed Control features a digital oscillator for accurate velocity control with an output frequency of up to 5 Megahertz. Output frequency will vary with the signal applied to the speed control input and can be limited by the amount specified by the Maximum Velocity parameter.

Speed can be adjusted using three modes of operation: voltage, current and PWM. The ranges are 0 to +5 volts and 0 to +10 volts in voltage mode, 0 to 20 mA and 4 to 20 mA in current mode, and 15 to 25 kHz in PWM mode. This allows the MDrive23-Plus Speed Control to be driven by a wide variety of sensors and control devices.

There are two basic methods for controlling the velocity: bidirectional and unidirectional. By moving the center point, both speed and direction are controlled by a potentiometer or joystick. By setting the center point to zero or the lower end of the potentiometer, only velocity is controlled by the speed control input; direction is controlled by a separate digital input.

The MDrive23Plus Speed Control has 18 setup parameters, which may be configured using the supplied IMS Analog Speed Control GUI, or a user-developed front-end communicating over SPI. The setup parameters enable the user to configure all MDrive operational parameters which are stored in nonvolatile memory.

The versatile, compact MDrive23Plus Speed Control is available in multiple configurations to fit various system needs.

Rotary motor versions come in four lengths and may include an optical encoder, control knob or planetary gearbox. Long life Acme screw linear actuators** are also available.

Connector style options give you choices for the best fit and features. Select from 12.0" (30.5cm) flying leads or pluggable terminal strip.

MDrivePlus connectivity has never been easier with options ranging from **all-inclusive QuickStart Kits to individual interfacing cables and mating connector kits** to build your own cables. *See pg 4.*

The MDrive23Plus is a compact, powerful and cost effective motion control solution that will reduce system cost, design and assembly time for a large range of brushless step motor applications.

CONFIGURING

The IMS Analog Speed Control is a software GUI for quick and easy parameter setup of the MDrivePlus Speed Control from a computer's USB port. GUI access is via the IMS SPI Motor Interface available at www.imshome.com. The IMS interface is also used to upgrade MDrive-Plus Speed Control firmware.

IMS Analog Speed Control features:

- Easy installation.
- Automatic detection of MDrivePlus version and communication configuration.
- Will not set out-of-range values.
- Tool-tips display valid range setting for each option.
- Simple screen interface.

MDrive23Plus SPEED CONTROL

STANDARD SPECIFICATIONS

INPUT VOLTAGE (+V)	Range	+12 to +75 VDC <i>applicable for motors:</i> - Single length - Double length - Triple length		+12 to +60 VDC <i>applicable for motor:</i> - Quad length	
		 Power supply current requirements = 2A (maximum)		 Power supply current requirements = 3A (maximum)	
SPEED CONTROL	Input	0 to +5 VDC*, 0 to +10 VDC, 4 to 20 mA, 0 to 20 mA or 15 to 25 kHz PWM			
	A/D Resolution	10 bit			
LOGIC INPUT	Start/Stop and Direction	Low Level	0 to +0.8 VDC		
		High Level	+2.0 to +5.0 VDC		
		Internal Pull-up Resistance (to +3.3 VDC)	20 kΩ		
MOTION	Oscillator Frequency (Max)	5 MHz			
	Microstep Resolution	Number of Settings	20		
		Steps Per Revolution	200, 400, 800, 1000, 1600, 2000, 3200, 5000, 6400, 10000, 12800, 20000, 25000, 25600, 40000, 50000, 51200, 36000 (0.01 deg/μstep), 21600 (1 arc minute/μstep), 25400 (0.001mm/μstep)		
THERMAL	Operating Temperature	Heat Sink	-40° to +85°C (non-condensing)		
		Motor	-40° to +100°C (non-condensing)		

*10 kΩ potentiometer resistance.

SETUP PARAMETERS

	Function	Range	Units	Default
A1	Analog Input Mode	0 to +5 VDC, 0 to +10 VDC, 4 to 20 mA, 0 to 20 mA, 15 to 25 kHz PWM	—	0 to +5 VDC
ACCL	Acceleration	91 to 1.5 X 10 ⁹	steps/second ²	1,000,000
C	Joystick Center	1 to 1022	counts	0
DB	Analog Deadband	0 to 255	counts	1
DECL	Deceleration	91 to 1.5 X 10 ⁹	steps/second ²	1,000,000
DIR	Motor Direction Override	Clockwise (CW) / Counterclockwise (CCW)	—	CW
FAULT	Fault/Checksum Error	Error Code	—	None
FS	Analog Full Scale	1 to 1023	counts	1023
HCDT	Hold Current Delay Time	HCDT + MSDT ≤ 65535	milliseconds	500
IF	Analog Input Filter	1 to 1000	counts	1
MHC	Motor Hold Current	0 to 100	percent	5
MRC	Motor Run Current	1 to 100	percent	25
MSDT	Motor Settling Delay Time	MSDT + HCDT ≤ 65535	milliseconds	0
MSEL	Microstep Resolution	1, 2, 4, 5, 8, 10, 16, 25, 32, 50, 64, 100, 108, 125, 127, 128, 180, 200, 250, 256	μsteps per full step	256
SSD	Stop/Start Debounce	0 to 255	milliseconds	0
VI	Initial Velocity	0 to <VM	steps/second	1000
VM	Maximum Velocity	VI to 5,000,000	steps/second	768,000
USER ID	User ID	Customizable	1–3 characters	IMS

All parameters are set using the supplied IMS SPI Motor Interface GUI and may be changed on-the-fly.
An optional Communication Converter is recommended with first orders.

MOTOR SPECIFICATIONS

	Holding Torque	Detent Torque	Rotor Inertia	Weight (Motor+Driver)
SINGLE LENGTH	90 oz-in / 64 N-cm	3.9 oz-in / 2.7 N-cm	0.0025 oz-in-sec ² / 0.18 kg-cm ²	21.6 oz / 612.3 g
DOUBLE LENGTH	144 oz-in / 102 N-cm	5.6 oz-in / 3.92 N-cm	0.0037 oz-in-sec ² / 0.26 kg-cm ²	26.4 oz / 748.4 g
TRIPLE LENGTH	239 oz-in / 169 N-cm	9.7 oz-in / 6.86 N-cm	0.0065 oz-in-sec ² / 0.46 kg-cm ²	39.2 oz / 1111.3 g
QUAD LENGTH	283 oz-in / 200 N-cm	14.2 oz-in / 10.0 N-cm	0.0108 oz-in-sec ² / 0.76 kg-cm ²	61.6 oz / 1746.3 g

ENCODER SPECIFICATIONS

Pin Assignments

	DIFFERENTIAL ENCODER <i>with locking connector feature</i>	SINGLE-END ENCODER
Encoder	Function	Function
Pin 1	No Connect	Ground
Pin 2	+5 VDC Input	Index
Pin 3	Ground	Channel A
Pin 4	No Connect	+5 VDC Input
Pin 5	Channel A –	Channel B
Pin 6	Channel A +	
Pin 7	Channel B –	
Pin 8	Channel B +	
Pin 9	Index –	
Pin 10	Index +	

Optional encoder cables are available.


Line Counts and Part Numbers

	DIFFERENTIAL ENCODER <i>with locking connector feature</i>	SINGLE-END ENCODER
Line Count	Part Number	Part Number
100	EAL	E1
200	EBL	E2
250	ECL	E3
256	EWL	EP
400	EDL	E4
500	EHL	E5
512	EXL	EQ
1000	EJL	E6
1024	EYL	ER


MOTOR PERFORMANCE — Speed-Torque

WIRE/PIN ASSIGNMENTS


Single Length Rotary Motor

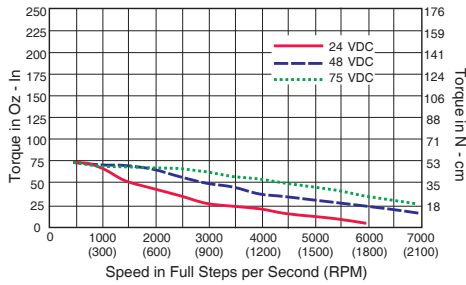


Double Length Rotary Motor

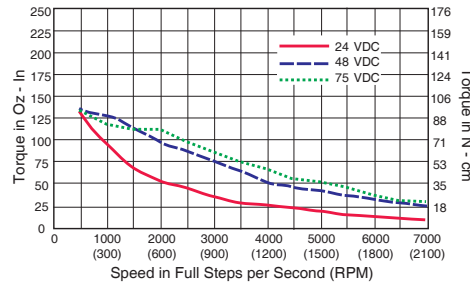

Triple Length Rotary Motor

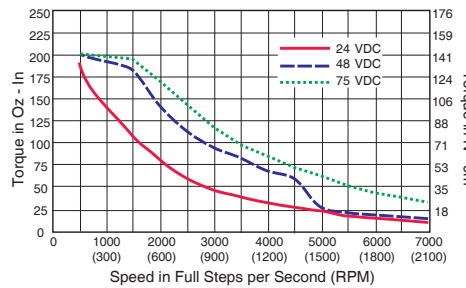

Quad Length Rotary Motor

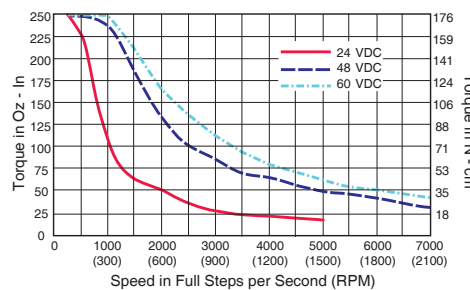


P1: I/O & POWER CONNECTOR		
Pluggable Terminal Strip	Flying Leads Wire Colors	Function
Pin 1	Violet	Start/Stop Input
Pin 2	Blue	CW/CCW Direction Input
Pin 3	Green	Speed Control Input
Pin 4	Yellow	+5 VDC Output
Pin 5	Gray	Logic Ground
Pin 6	Black	Power Ground
Pin 7	Red	Input Voltage: +12 to +75 VDC – Single, Double & Triple Motors +12 to +60 VDC – Quad Motor

P2: COMM CONNECTOR (SPI)		
10-Pin IDC	10-Pin Wire Crimp	Function
Pin 1	Pin 9	No Connect
Pin 2	Pin 10	No Connect
Pin 3	Pin 7	No Connect
Pin 4	Pin 8	SPI Chip Select
Pin 5	Pin 5	Communications Ground
Pin 6	Pin 6	+5 VDC Output
Pin 7	Pin 3	SPI Master Out – Slave In
Pin 8	Pin 4	SPI Clock
Pin 9	Pin 1	No Connect
Pin 10	Pin 2	SPI Master In – Slave Out

MECHANICAL SPECIFICATIONS — MDrive23Plus Speed Control


Dimensions in Inches (mm)

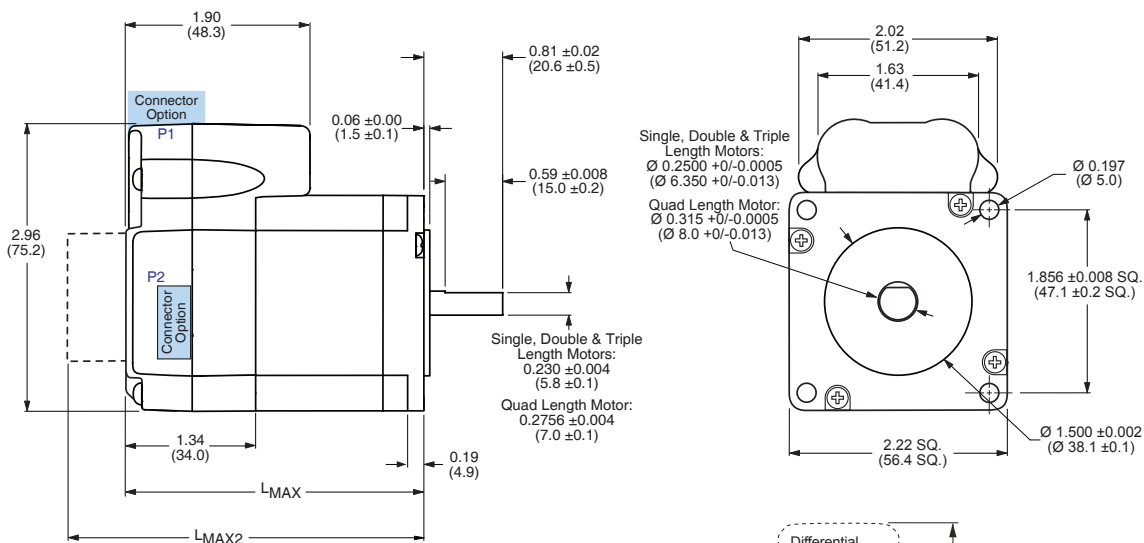



MDrive Lengths Inches (mm)

Motor Length	LMAX	LMAX2
	SINGLE SHAFT or LINEAR ACTUATOR	CONTROL KNOB or ENCODER
Single	2.65 (67.31)	3.36 (85.34)
Double	3.02 (76.71)	3.73 (94.74)
Triple	3.88 (98.55)	4.59 (116.59)
Quad	5.28 (134.15)	5.99 (152.19)



LMAX2 Options

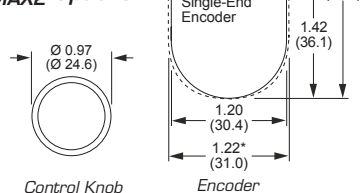

P1 Connector Options



P2 Connector Options



ORDER INFORMATION — MDrive23Plus Speed Control

CONNECTIVITY

- new

QuickStart Kit
For rapid design verification, all-inclusive QuickStart Kits have communication converter, prototype development cable(s), instructions and CD for MDrivePlus initial functional setup and system testing.
- new

Communication Converters
Electrically isolated, in-line converters pre-wired with mating connectors to conveniently set/program communication parameters for a single MDrivePlus via a PC's USB port. Length 12.0" (3.6m).
Mates to connector:
10-Pin IDCMD-CC300-001
10-Pin Wire CrimpMD-CC302-001
- new

Mating Connector Kits
Use to build your own cables. Kit contains 5 mating shells with pins. Cable not supplied. Manufacturer's crimp tool recommended.
Mates to connector:
10-Pin Wire CrimpCK-02
Kit contains 5 mating connectors that press fit onto ribbon cable. Cable not supplied.
10-Pin IDCCK-01


** Consult Factory for Availability.
Connectivity details: www.imshome.com/cables_cordsets.html

OPTIONS

- Linear Actuator****
The MDrive23Plus is offered with numerous linear actuator styles and options to satisfy a broad range of linear motion applications. Contact the factory for details or see: www.imshome.com/mdriveplus_linear_actuator.html
- External Encoder**
External optical encoders, single-end or differential, are offered factory-mounted with the MDrive23Plus. Refer to the Encoder Specifications section for available line counts. All encoders come with an index mark. Optional encoder cables are available. Order separately.
Single-end Cable (12.0"/30.5cm).....ES-CABLE-2
Differential Locking Cable (6.0'/1.8mm).....ED-CABLE-6
- Control Knob**
The MDrive23Plus Speed Control is available with a factory-mounted rear control knob for manual shaft positioning.
- Planetary Gearbox**
Efficient, low maintenance planetary gearboxes are offered assembled with the MDrive23Plus. Refer to details and part numbers on the back cover.

PART NUMBERING

Plus
base version



K

MDO1

S

23

7

-

OPTION

QuickStart Kit
details above

P1: I/O & Power
F = 12" Flying Leads
P = Pluggable Clamp
Type Terminal Strip

P2: Communications
D = SPI with 10-Pin IDC Connector
L = SPI with 10-Pin Friction Lock Wire
Crimp Connector

Motor
A = Single Length & Linear Actuator**
B = Double Length
C = Triple Length
D = Quad Length

Example #1: Part Number **MDO1PSD23A7** is an MDrive23Plus Speed Control with pluggable I/O & power interface, SPI communications with 10-pin IDC connector, and NEMA 23 single length motor.

**Consult Factory for Availability.

OPTIONS

Linear
Actuator**

-L

For complete product specifications, see:
www.imshome.com/mdriveplus_linear_actuator.html

External
Encoder

-E

Refer to encoder specifications section for line counts and part numbers.
Example: **MDO1PSD23A7-EHL** adds an external 500-line count differential optical encoder with index mark to example #1.

Control
Knob

-N

Example: **MDO1PSD23A7-N** adds a rear control knob for manual positioning to example #1.

Planetary
Gearbox

-G

-F

Optional NEMA Flange

Refer to gearbox page for complete table of ratios and part numbers.
Example: **MDO1PSD23A7-G1A2** adds a 1-stage planetary gearbox with 5.18:1 ratio to example #1. Add -F for optional NEMA flange.

4 MDrive23Plus Speed Control REV040309

MDRIVE23PLUS WITH PLANETARY GEARBOX


The MDrive23Plus is available with a Planetary Gearbox option developed to increase torque at lower speeds, enable better inertia matching and produce finer positional resolutions. These efficient, low maintenance Planetary Gearbox come fully assembled with the MDrive and are offered in a large number of reduction ratios in 1-, 2- and 3-stage configurations. An optional NEMA Output Flange allows mounting the Planetary Gearbox to the load using a standard NEMA bolt circle. Planetary Gearbox may be combined with other MDrive23Plus options, however are unavailable with Linear Actuators.

Planetary Gearbox Parameters

	Permitted Output Torque (oz-in/Nm)	Gearbox Efficiency	Maximum Backlash	Output Side with Ball Bearing			
				Maximum Load (lb-force/N)		Weight (oz/g)	
				Radial	Axial	Gearbox	with Flange
1-STAGE	566/4.0	0.80	0.70°	45/200	13/60	25.0/711	25.9/735
2-STAGE	1699/12.0	0.75	0.75°	72/320	22/100	32.2/914	33.3/945
3-STAGE	3540/25.0	0.70	0.80°	101/450	34/150	39.4/1117	40.7/1155

Planetary Gearbox for MDrive23Plus

Dimensions in Inches (mm)

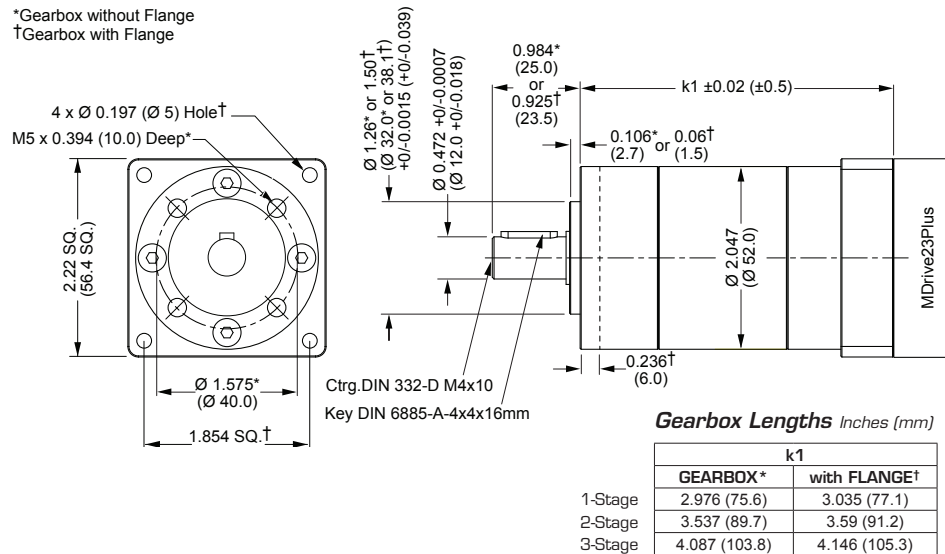

Ratios and Part Numbers

Planetary Gearbox	Ratio (Rounded)	Part Number**
1-Stage	3.71:1	G1A1
1-Stage	5.18:1	G1A2
1-Stage	6.75:1	G1A3
2-Stage	13.73:1	G1A4
2-Stage	15.88:1	G1A5
2-Stage	18.37:1	G1A6
2-Stage	19.20:1	G1A7
2-Stage	22.21:1	G1A8
2-Stage	25.01:1	G1A9
2-Stage	26.85:1	G1B1
2-Stage	28.93:1	G1B2
2-Stage	34.98:1	G1B3
2-Stage	45.56:1	G1B4
3-Stage	50.89:1	G1B5
3-Stage	58.86:1	G1B6
3-Stage	68.07:1	G1B7
3-Stage	71.16:1	G1B8
3-Stage	78.72:1	G1B9
3-Stage	92.70:1	G1C1
3-Stage	95.18:1	G1C2
3-Stage	99.51:1	G1C3
3-Stage	107.21:1	G1C4
3-Stage	115.08:1	G1C5
3-Stage	123.98:1	G1C6
3-Stage	129.62:1	G1C7
3-Stage	139.14:1	G1C8
3-Stage	149.90:1	G1C9
3-Stage	168.85:1	G1D1
3-Stage	181.25:1	G1D2
3-Stage	195.27:1	G1D3
3-Stage	236.10:1	G1D4
3-Stage	307.55:1	G1D5

**Include optional planetary gearbox by adding -G plus 3 characters to the end of an MDrive part number.

U.S.A. SALES OFFICES

Eastern Region

Tel. 862 208-9742 - Fax 973 661-1275
e-mail: jroake@imshome.com

Central Region

Tel. 260 402-6016 - Fax 419 858-0375
e-mail: dwaksman@imshome.com

Western Region

Tel. 602 578-7201
e-mail: dweisenberger@imshome.com

IMS ASIA PACIFIC OFFICE

30 Raffles Pl., 23-00 Chevron House, Singapore 048622
Tel. +65/6233/6846 - Fax +65/6233/5044
e-mail: wlee@imshome.com

IMS EUROPEAN SALES MANAGEMENT

4 Quai Des Etoiles
69005 Lyon, France
Tel. +33/4 7256 5113 - Fax +33/4 7838 1537
e-mail: bmartinez@imshome.com

IMS UK Sales

Machine Technology Centre, Blackhill Drive
Wolverton, Milton Keynes MK12 5TS
Tel. +44/0 1908 628000 - Fax +44/0 1908 628001
e-mail: mcheckley@imshome.com

TECHNICAL SUPPORT

Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107
e-mail: etech@imshome.com

Intelligent Motion Systems, Inc.

370 North Main Street, P.O. Box 457
Marlborough, CT 06447 - U.S.A.
Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107
e-mail: info@imshome.com
http: //www.imshome.com