






Section 7 Special Applications

Pneumatic Plates			
Connecting	176		
Joining	177		
Blank	178		
Pneumatic Fasteners			
Universal	178		
Butt	178		
Pneumatic Seals	179		
Workstation Components			
Bins	181		
Adjustable Bin Mounting	182		
Drawers	183		
Tool Runner	183		
Lift Systems			
Two-Cylinder	184		
Four-Cylinder	185		

Pneumatic Profiles

Application


The cavity within a profile can be used to distribute compressed air as well as provide structural foundation for the system application. Connections may be made at any location using the proper accessory component and machining. Many of the profile configurations also provide for multiple channels allowing for the complete distribution of compressed air in complex systems.

Available Profiles

Part #	Description	Available Air Channels	Structural Properties					Weight [kg/m]	Page
			I _x [cm ⁴]	I _y [cm ⁴]	W _x [cm ⁴]	W _y [cm ⁴]	Section [cm ²]		
10-080	Profile 80X40 Standard	1	71.79	17.23	17.99	8.62	11.53	3.18	26
11-080	Profile 80X40 Heavy	1	102.00	26.73	25.50	13.37	16.59	4.58	26
10-088	Profile 80X80 Standard	1	138.30	138.30	34.58	34.58	20.17	5.45	27
11-088	Profile 80X80 Heavy	1	185.20	185.20	46.30	46.30	26.01	7.02	27
10-120	Profile 120X40 Standard	2	220.54	24.22	36.76	12.11	16.12	4.35	28
11-122	Profile 120x80 Heavy	4	575.07	274.46	92.75	68.61	40.08	10.82	27
10-164	Profile 160X40 Standard	3	517.25	33.13	64.65	16.56	21.48	5.80	28
11-140	Profile 160X40 Heavy	3	749.51	54.80	93.60	27.40	32.30	8.72	28
10-160	Profile 160X80 Standard	4	922.50	271.10	115.30	67.80	38.10	10.29	29
11-160	Profile 160X80 Heavy	2	1215.79	357.51	151.97	89.38	51.72	13.96	29

Cavity areas shown are in cm² (1 cm² = 0.155 in²)


To calculate volume, multiply area by the profile length.




10-080




11-080




10-088




11-088



10-120




11-122




10-164



11-140



10-160



11-160

Pressure Ratings and Leak Test

Safe Maximum Pressure Rating

1725 kPa (250 psi)

Supporting Pressure Rating Data

Procedures

Stage 1

A sample assembly was connected to a nitrogen cylinder. Pressure of 690 kPa (100psi) was applied. The holding button head screws were checked and tightened to a torque of 13.6 Nm (10 ft-lbs). Pressure was increased in stages to 6900 kPa (1000 psi) with continuous inspection for leaks. This was duplicated for each profile.

Stage 2

A sample was filled with water and pressure was applied in the same manner as in stage 1. Pressure was increased until a gaskets leaked or profiles burst. This was duplicated for each profile.

Sample Testing Results

Profile	Pressure Medium	Pressure kPa (psi)	Observation
10-080	Nitrogen	6,900 (1000)	No Leakage
	Water	9,655 (1400)	Profile Burst
10-088	Nitrogen	6,900 (1000)	No Leakage
	Water	9,655 (1400)	Profile Burst
11-080	Nitrogen	6,900 (1000)	No Leakage
	Water	27,580 (4000)	No Leakage
11-088	Nitrogen	6,900 (1000)	No Leakage
	Water	10,345 (1500)	Gasket Leaked


Connecting Plates

Application


Connecting plates provide threaded NPT ports and align with air chambers within properly machined profiles. Both styles are designed to be attached to the end face of the profile. The 80x80 plate can also be attached to the T-slotted side of a profile with an 80mm dimension. All plates include the appropriate sealing gasket. These plates can be used to seal end of profile by using appropriate plug.

Technical Data

Plate: Aluminum, Anodized
Seal: Neoprene or Buna

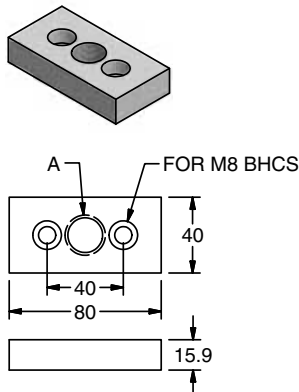

21-040zX

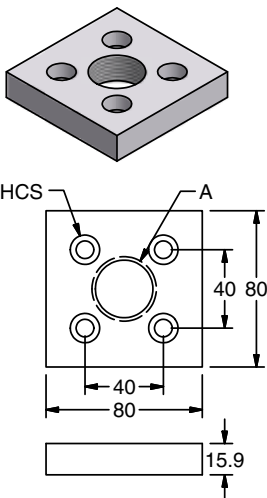

21-043zX



Recommended Fasteners

Mounting	Hardware	21-040zX	21-043zX
End Face Mount	Screw	(2) 24-125-8	(4) 24-125-8
Side Mount	Screw	—	(4) 24-118-8
	T-Nut	—	(4) 20-058

Ordering Information

Description	A	Unit	Weight	Part #
Connector Plate 80x40	1/8"-27 NPT	1 Set	0.11 kg	21-040z1
	1/4"-18 NPT	1 Set	0.11 kg	21-040z2
	3/8"-18 NPT	1 Set	0.11 kg	21-040z4
	1/4" BSPP	1 Set	0.11 kg	21-040z6
	1/2"-14 NPT	1 Set	0.11 kg	21-040z8
Connector Plate 80x80	1/2"-14 NPT	1 Set	0.23 kg	21-043z2
	1/2" BSPP	1 Set	0.23 kg	21-043z6
	1"-11.5 NPT	1 Set	0.23 kg	21-043z8

Joining Plates

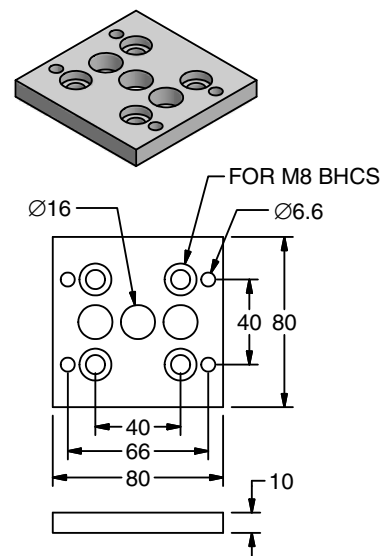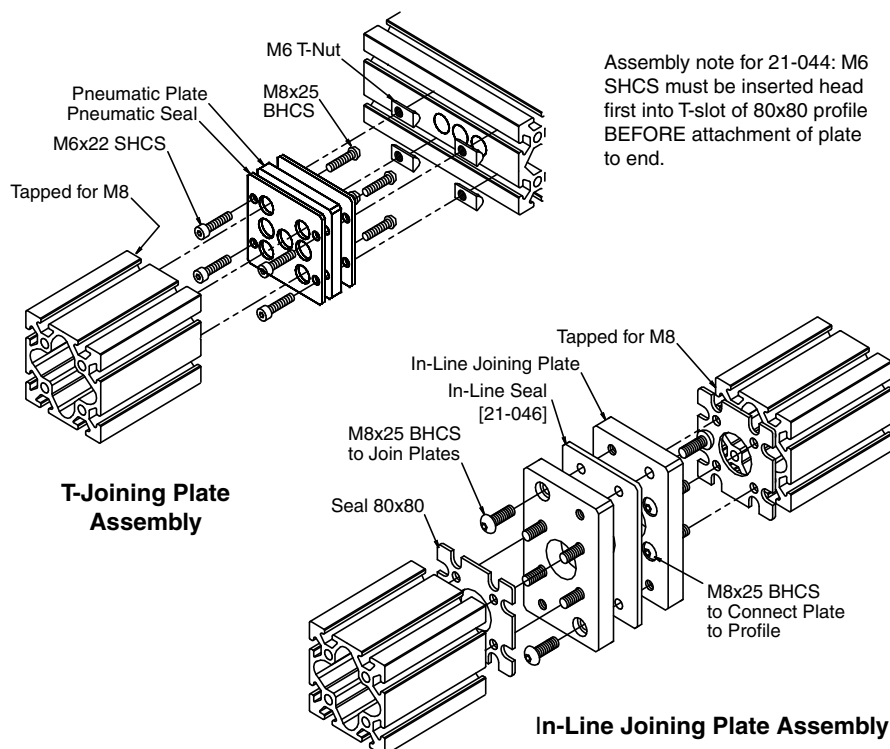

21-044



Application

Joining Plates are used to join two profiles together while extending the compressed air cavity across the joint. These plates are available in in-line as well as "T" configurations. In-Line connections couple the end face of two profiles into a continuous straight section. "T" plates allow a profile to extend at a 90° angle. All Joining Plates come with the necessary seals for the intended application.

Technical Data

21-044: Steel, Galvanized

21-045: Aluminum, Clear Anodized

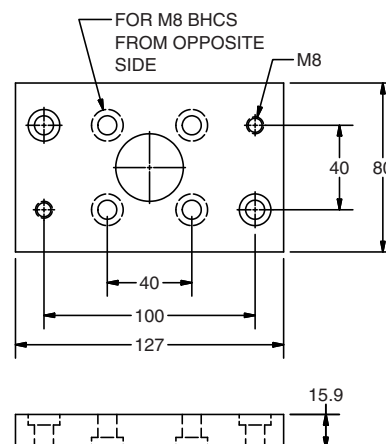

21-045



Recommended Fasteners

Mounting	Screws	T-Nuts
"T" Connection (21-044)	(4) 24-125-8 (4) 24-322-6	(4) 20-058
In-Line (21-045)	(12) 24-125-8	—



Ordering Information

Description	Unit	Weight	Part #
T-Joining Plate	1 Set	0.42 kg	21-044
In-Line Joining Plate	1 Set	1.09 kg	21-045

Blank Plates



21-8000z1



21-4000z1

Application

Used for closing 80x40 and 80x80 profile ends.

Technical Data

Aluminum, Clear Anodized

Recommended Fasteners (Order Separately)

Screws: 24-125-8

Ordering Information

Description

Blank Plate 80x40
Blank Plate 80x80

Unit

Each
Each


Weight

0.1 kg
0.2 kg


Part

21-4000z1
21-8000z1

Pneumatic Fasteners



20-011



Application

Two styles for connecting 80x40 or larger profiles together when used as compressed air piping. Universal is used on 90° connections. Butt-Fastening is for end to end connections

Technical Data

Zinc Cast, Galvanized

Ordering Information

Description

Pneumatic Universal Fastening Set
Butt-Fastening Set M6

Unit


Each
Each

Weight

36 g
45 g

Part

20-011
20-012



20-012

Pneumatic Seals

Application

Replacement seals for pneumatic connections.


Technical Data

Neoprene or Buna, Black


Note: Seals should be retightened after 24 hours of initial installation.

Ordering Information


Description	Unit	Part #
Seal 80x40	Each	21-041
Seal 80x80	Each	21-042
Seal 80x80 T-Joining Plate	Each	21-144
Seal 80x80 In-Line Plate	Each	21-046




21-041

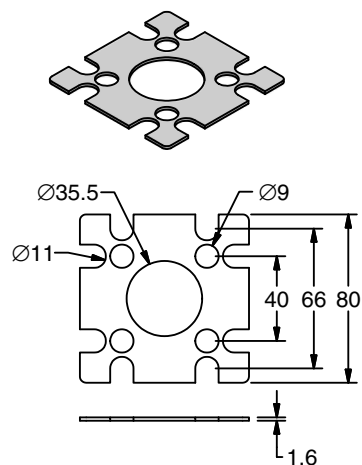

21-042

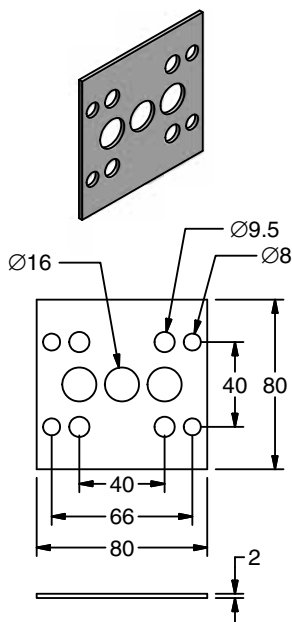

21-144

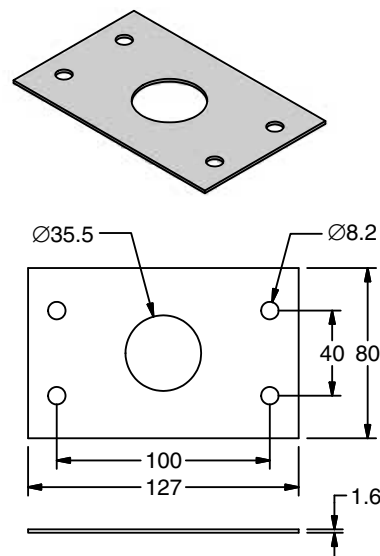

21-046

Complete Workstations




Modular designed workstations by IPS offer a wide range of options and accessory combinations. All structural profiles used in our workstations are made of high strength aluminum, combined with our unique fastening system which provides exceptional flexibility in design for a wide range of applications. All profiles are clear anodized with several available in black. Special colors and coatings are available on request.

T-Slots provide easy attachment points for accessories. Closed face profiles are also available for applications requiring aesthetically clean looks or reduction in the potential for dust and contamination.


All workstations can be customized for your exact needs. From the heaviest assembly tables to ergonomic LEAN work cells, we have the products and expertise to meet your specifications.




Parts Bin

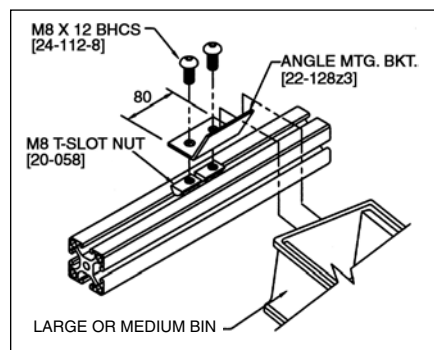



1

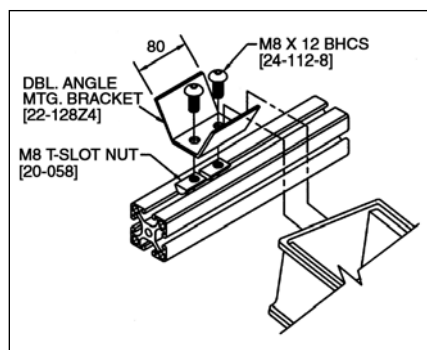

2

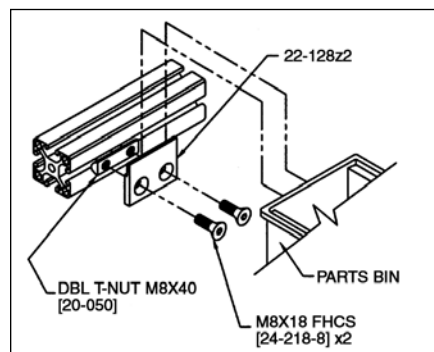

3



22-126 thru 22-129

Application


Bins for small to large parts and equipment on work benches, work stations, parts racks, etc. Minimizes parts handling.

Order all hardware separately


Ordering Information

Description	Dimensions			Mounting Hardware	Material	Weight (kg)	Part #
	W	D	H				
Parts Bins	140	280	127	See fig. 1-3 for mounting choices	Heavy duty polypropylene, red	0.67	22-126
	280	280	127	See fig. 1-3 for mounting choices		1.24	22-127
	105	135	76	See fig. 1-3 for mounting choices		0.08	22-128
	105	187	76	See fig. 1-3 for mounting choices		0.11	22-129
Flat Mounting Bracket	60	6.4	25.4	Not included (See fig. 3)	Al, anodized	0.02	22-128Z2
Angled Mounting Bracket	80	47	30	Not included (See fig. 1)	Al, anodized	0.08	22-128Z3
Dbl Ang. Mounting Bracket	80	74	30	Not included (See fig. 2)	Al, anodized	0.07	22-128Z4


Adjustable Bin Mounting Components

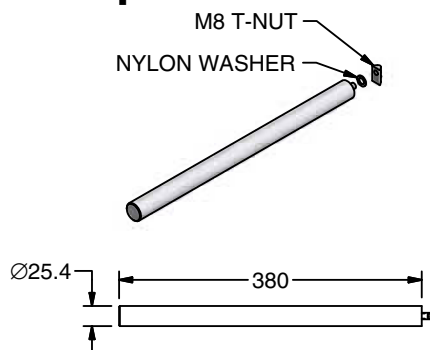

22-130

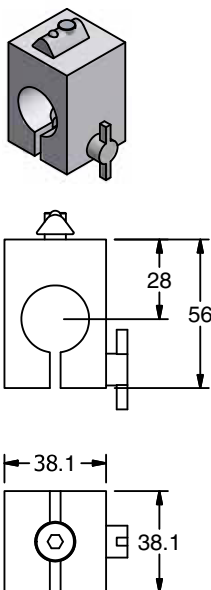

22-134

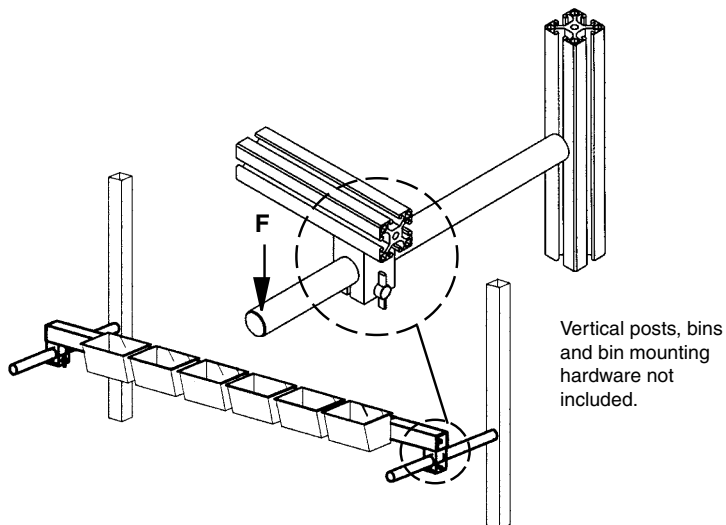

Application

Adjustable bin mounting system for 40 Series work stations and assembly lines. Allows shelf adjustment in two directions: up-down and in-out. 40 series profile can be used as brace for bins at any required horizontal length.

Bins and bin mounting hardware must be ordered separately.

Technical Data

Slide Rail: Al, clear anodized

Slide Collar: Delrin, black


Includes all hardware as shown.

Max. load $F = 60 \text{ N}$ (13.5 lbs)

Mounting Brace includes: profile and two end caps.

Ordering Information

Description	Unit	Weight	Part #
Bin Mounting Slide Rail (2 req.)	1 set	0.53 kg	22-130
Slide Collar (2 req.)	1 set	81 g	22-134

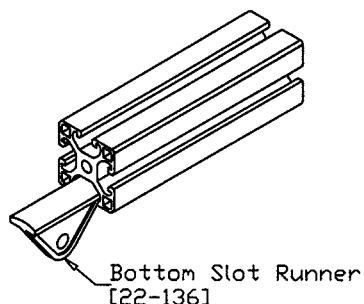

Application

To suspend and position tools at work stations. Runner slides in 40 series profile.

Technical Data

Runner: glass-filled nylon, black


Max. load 100 N (23 lbs)

Runner Stop can be created by using:

- (1) Flat Point Set Screw [24-516-5F]
- (1) M5 Z-Nut [20-035]

Ordering Information

Description	Unit	Weight	Part #
Runner	1 pc	12 g	22-136

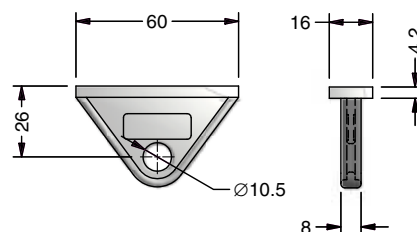

22-136

Technical Data

Grey painted steel construction with ball bearing slides and padlock attachment. Stackable.

Order all hardware separately

For mounting to 40 series profile:

Screws	24-118-8
T-nuts	20-058
Flat Washers	24-700-8

Ordering Information

Description (W x D x H)

Drawer 400 x 508 x 172mm

Drawer 400 x 508 x 343mm



* Contact factory for additional details

Part #

22-121



22-122

Drawer

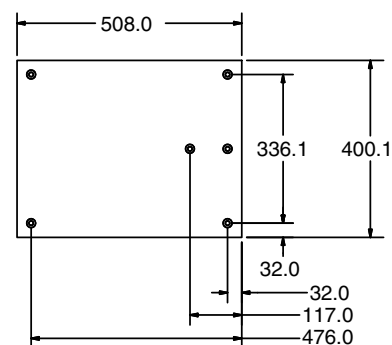


22-121

2-Cylinder Lift System with Telescopic Guides

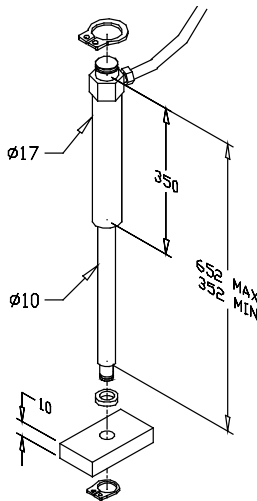
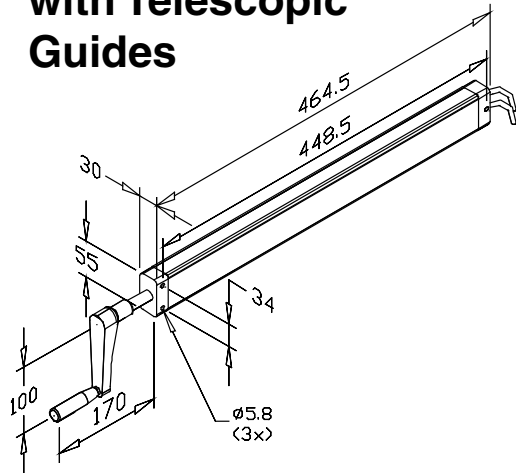


50-702

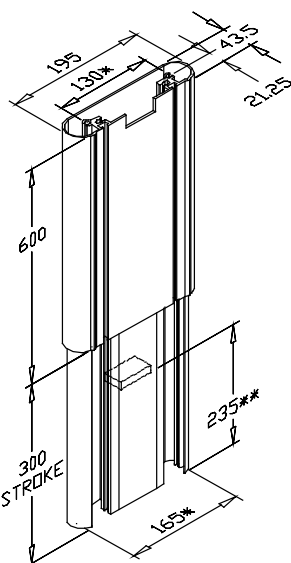


* Distance between mounting holes
** Cylinder mounting distance

50-703

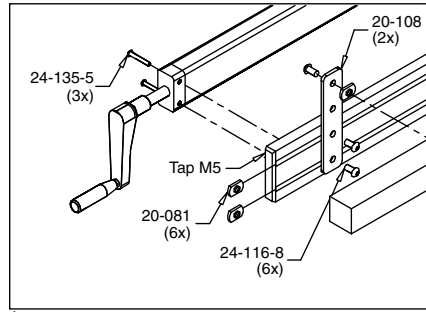


1
2,3

Pump mount details.
Telescopic guide and cylinder mount details (hardware quantities shown per side).

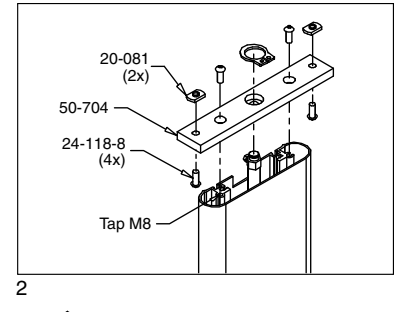

2

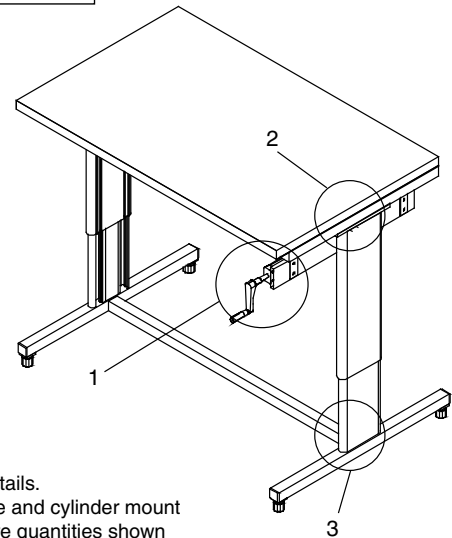

Application

2-Cylinder Lift System together with Telescopic Guides create a compact versatile height adjustment mechanism. The system consists of two fluid-drive cylinders connected by flexible tubing to a manual pump with a unique "fold-away" hand crank. Due to cylinder internal construction, use of telescopic guides is required. Each guide has four mounting holes (two on top, two on bottom) that can be tapped for M8 or 5/16"-18.

Order mounting hardware for pump and telescopic guides separately (see application illustration).

Technical Data

Maximum lift capacity 2224 N (500lbs.)

Adjustment range 300mm

Cylinders are single acting. External force of approx. 67 N (15 lbs.) is required for return stroke.


Tubing length: one at 8' and one at 10' section.

Minimum bending radius for tubing 40mm.


Operating temperature 0 - 115°F.

Ordering Information

Description	Unit	Weight	Part #
2-Cylinder Lift System	1 set		50-702
Telescopic Guide (2 required)	1 pc	4.3 kg	50-703
Mounting Plate for 50-703	1 pc	6 g	50-704

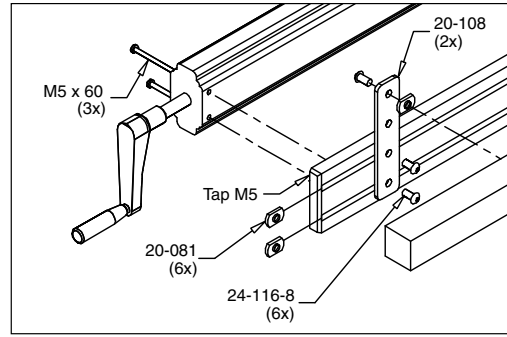


1

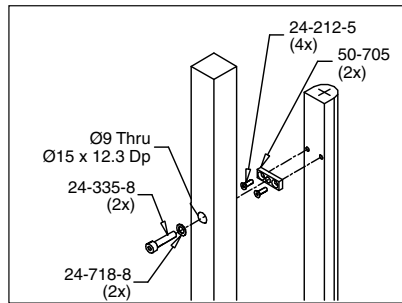



2

1 Pump mount details.
2,3 Cylinder mount details
(hardware quantities shown
per cylinder).



3

4-Cylinder Lift System

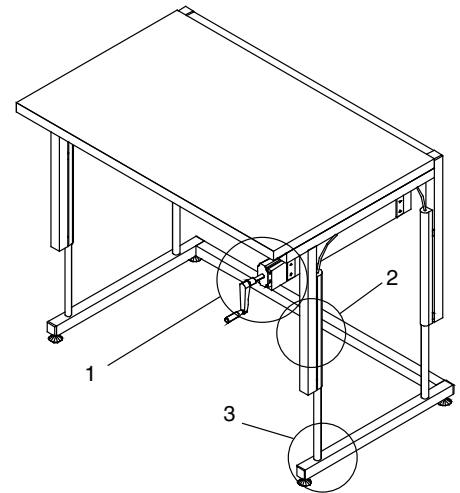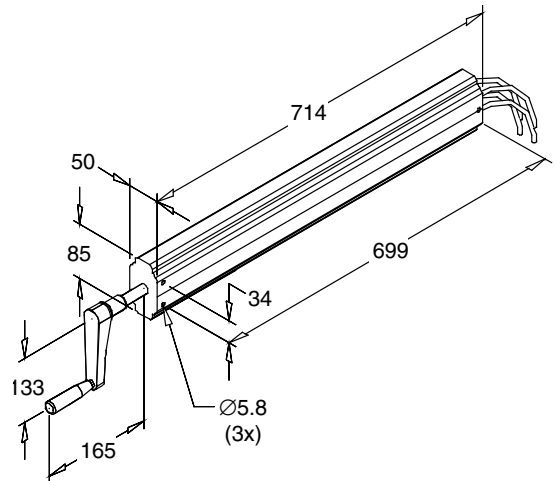

Application

4-Cylinder Lift System is a compact versatile height adjustment mechanism. It consists of four fluid-drive cylinders connected by flexible tubing to a manual pump with a unique "fold-away" hand crank. The cylinders are completely self-contained, requiring no external support structure.

Each cylinder has five pre-tapped mounting holes: four on a flat side (M5x7mm deep) and one at the bottom (M10x12mm deep).

Technical Data

Maximum lift capacity 3336 N (750lbs.)

Adjustment range 300mm

Cylinders are single acting. External force of approx. 89 N (20 lbs.) is required for return stroke.

Tubing length: two at 8' and two at 10' section.

Minimum bending radius for tubing 40mm.

Operating temperature 0 - 115°F.

Order all mounting hardware separately (see application sample 1-3).

Ordering Information

Description

4-Cylinder Lift System
Mounting Plate for 50-700 (2 per cylinder)

Unit	Weight	Part #
1 set	11.7 kg	50-700
1 pc	6 g	50-705

